


Ricoh High Speed Belt Type Digital Textile Printer

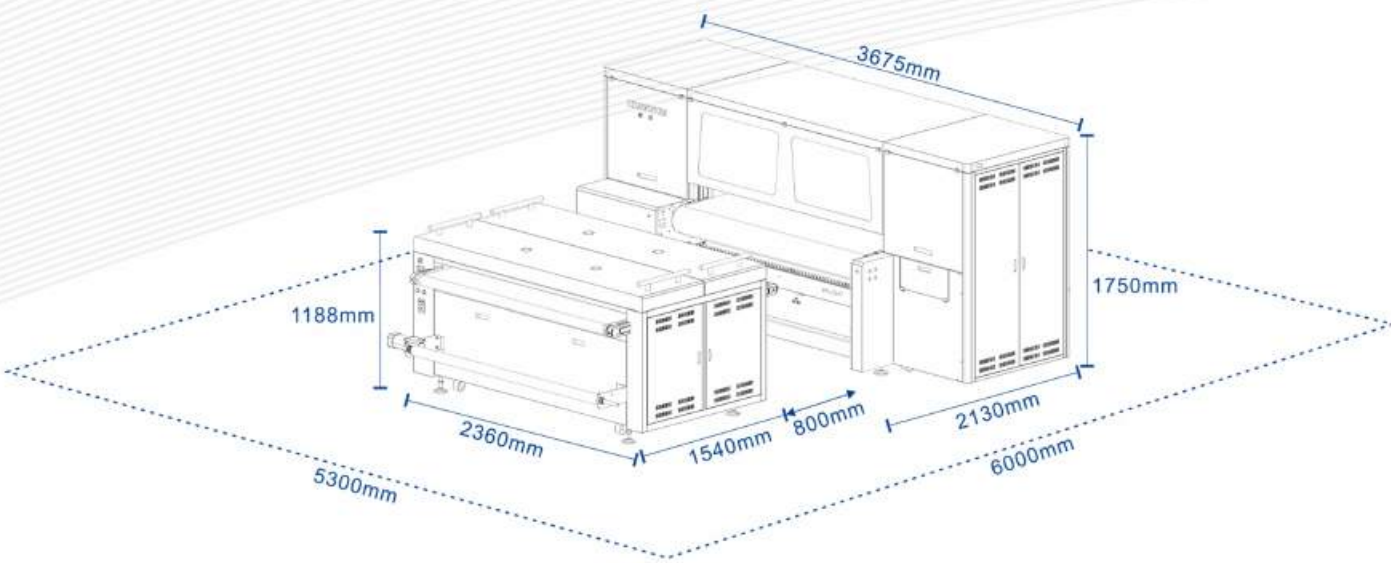

TECHNICAL PARAMETERS

Print Head	Ricoh G6			
Print head Qty	4 pcs		8 pcs	
Nozzle Amount	1280 Nozzles			
Effective Print Width	1800mm			
Colour	4 colors	8 colors	4 colors	8 colors
Speed				
508*600 dpi 2pass	140m²/h	70m²/h	280m²/h	140m²/h
508*900 dpi 3pass	90m²/h	50m²/h	180m²/h	90m²/h
Ink type	Reactive、Disperse、Pigment、Acid Ink			
Ink supply model	Auto-Ink supply of peristaltic pump			
Drying type	Suspended Drying		Independent drying unit	
Maximum drying power	5 KW		20 KW	
Unwinding device	Inflatable shaft			
Winding device	Inflatable shaft constant tension motor			
Carriage adjustable Height	3-30mm Adjustable			
Print head Height	3-5mm Adjustable			
Print medium	Fabric			
Transfer medium	Conveyor belt			
Transmission model	USB 3.0			
File Format	TIFF/JPG/PDF/BMP			
RIP Software	Neostampa			

● The speed will be subject to the actual test. It will changed by different kinds of fabric, fabric thickness, the method of feeding and arrange mode of nozzle

DESCRIPTION OF ACCESSORIES



1 RICOH G6 Print head



2 Auto up & down motor Of carriage



3 Large capacity two-level ink box with electromagnetic valve



4 High-precision magnetic grid



5 Degassing moudle



6 Pneumatic disc brake




RICOH 8 and 16 head
in REACTIVE & PIGMENT INK OPTIONS



High Speed Belt Type Digital Textile Printer

High Speed Belt Type Digital Textile Printer

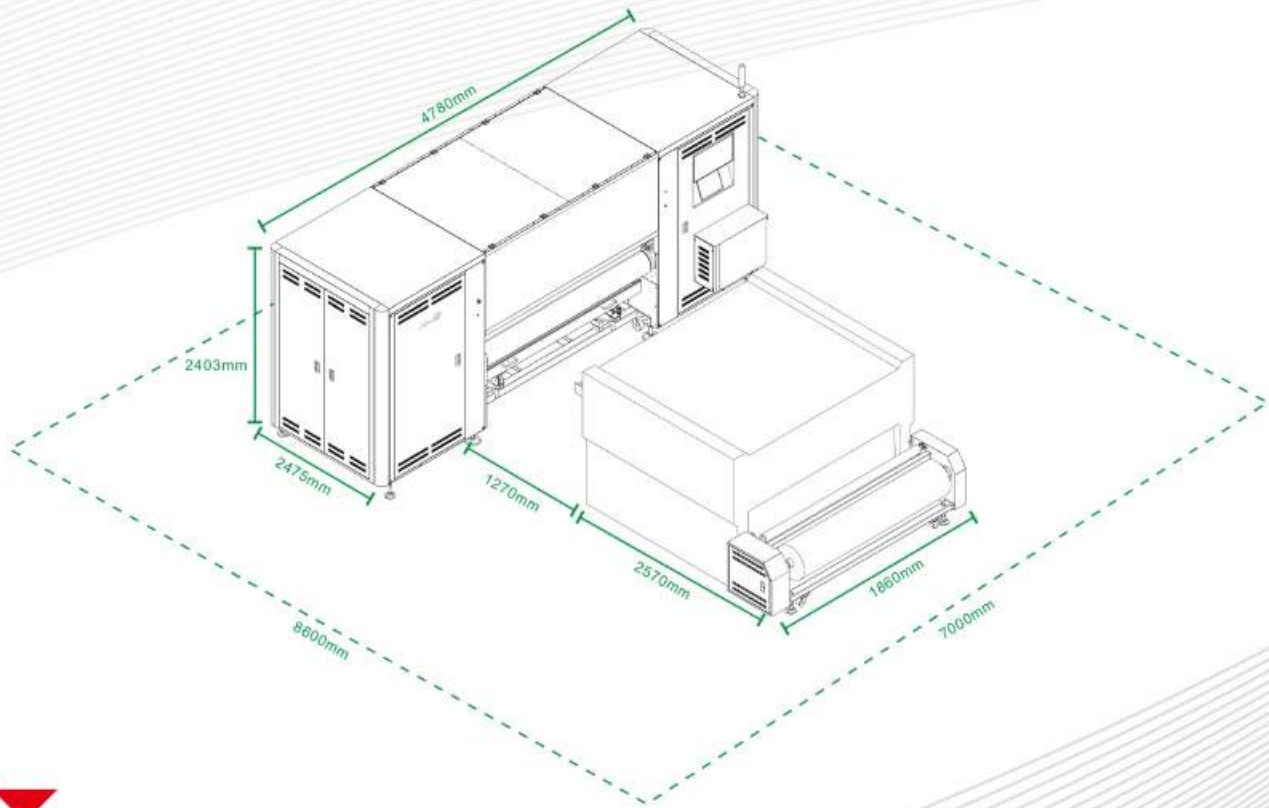

DESCRIPTION OF ACCESSORIES



1 RICOH G6 Print head



2 Auto up & down motor Of carriage



3 Large capacity two-level ink box with electromagnetic valve



4 High-precision magnetic grid



5 Degassing moudle



6 Belt cleaning device

TECHNICAL PARAMETERS

Print Head	Ricoh Printhead G6
Print Head Qty	16 pcs
Effective Print Width	2000mm
Colour	8 colors
Speed	
2 pass	280m ² /h
3 pass	180m ² /h
Ink type	Reactive, Disperse, Pigment, Acid Ink
Drying type	Independent drying unit
Maximum drying power	40 KW
Printing unit consumption	10 KW
Unwinding device	Inflatable shaft
Winding device	Inflatable shaft constant tension motor
Carriage adjustable Height	3-30mm Adjustable
Print head Height	3-5mm Adjustable
Print medium	Fabric
Transfer medium	Conveyor belt
Transmission model	USB 3.0
File Format	TIFF/JPG/PDF/BMP
RIP Software	Neostampa

● The speed will be subject to the actual test. It will be changed by different kinds of fabric, fabric thickness, the method of feeding and arrange mode of nozzles.

Apsom Technologies (India) Pvt. Ltd.

Head Office :
Unit 202, Shri Sai Corporate Park, Plot No. B/8,
Mahakali Mandir Road, Off Link Road, Opp. Laxmi
Nagar Ind Estate, Goregaon (West), Mumbai - 400 104

Delhi NCR: 12/36, Site IV, Sahibabad Industrial Area, Ghaziabad,
U.P. - 201010

Kolkata: Sriyanka Flat Owners Association, 227/5, Satin Sen
Sarani, Kolkata - 700054

Surat: 3, Lalwala Compound, Near Bhatiya Complex, Sosyo Circle,
Bamroli Road, Udhana, Surat - 395017

Mumbai: +91 93232 18276 | Surat: +91 93232 18274 | North: +91 9810343951 | East: +91 9810343951 | South: +91 8291701781

www.apsomtechnologies.com info@apsomtechnologies.com @apsomtechnologies

